


ICIP-D2000VIR

2 Megapixel 3-9mm VF Full HD Vandal-proof IR IP Dome Camera

- 1/3" 2 Megapixel progressive scan Exmor CMOS
- Multiple network monitoring: Web viewer, CMS(ICRSS/PSS)
- H.264 & MJPEG dual-stream encoding
- 25/30fps@1080P(1920x1080)
- DWDR, Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC
- 3~9mm varifocal lens
- Built-in 2/1 alarm in/out
- Max. IR LEDs length 60FT
- Micro SD memory, IP66, IK10, PoE,



Product Overview

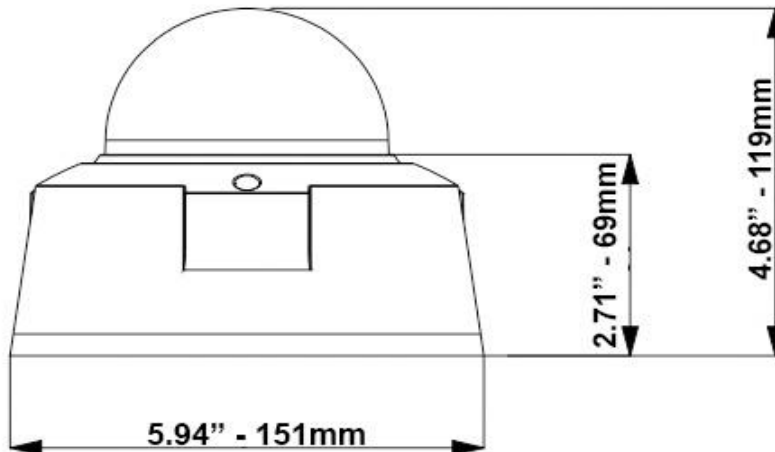

Head Office

IC Realtime
3050 N Andrews Ave AXE
Pompano Beach,
FL 33064

Tel: 1 (866) 997-9009
Fax: 1 (954) 827-5900
Email: Info@icrealtime.com
Web: www.icrealtime.com

West Coast Office

IC Realtime
14180 West Van Buren St.
Suite B105
Goodyear, AZ 85338

Tel: 1 (602) 910-3432
Fax: 1 (602) 626 3545
Email: west@icrealtime.com
Web: www.icrealtime.com

ICIP-D2000VIR

2 Megapixel 3-9mm V_F Full HD Vandal-proof IR IP Dome Camera

Camera	
Image Sensor	1/2.8" 2Megapixel PS Exmor CMOS
Effective Pixels	1920(H)x1080(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/4~1/10000
Min. Illumination	Color: 0. 2Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)
S/N Ratio	>50dB
Video Output	1 channel, Push Terminal (1.0Vp-p/75Ω)
Camera Features	
Max. IR LEDs Length	60FT
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto
Gain Control	Auto/Manual
Noise Reduction	2D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	3-9mm motorized
Max Aperture	F1.2
Focus Control	Auto
Angle of View	H:105°(Wide)~ 36°(Tele)
Lens Type	Motorized / Auto Iris(DC)
Mount Type	Board-in Type
Video	
Compression	H.264 / MJPEG
Resolution	1080P(1920x1080) / 720P(1280x720) / D1(704x480) / CIF(352x240)
Frame Rate	Main Stream: 1080P/720P(1 ~ 25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps
Audio	
Compression	G.711a / G.711u (64kbps) / PCM(128kbps)
Interface	1/1 channel In/Out
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF Ver. 2.0

Max. User Access	10 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 32GB
Alarm	1/1 channel In/Out
General	
Power Supply	DC12V, PoE(802.3af)
Power Consumption	<10W
Working Environment	-14°F~140°F / -25°C~+60°C, 10%~90%
Protection Level	IK10 & IP66
Dimensions	Φ5.94"x4.68"mm ~ Φ151mmx119mm
Weight	3.3lb ~ 1.25kg