

ICR-630


700 TV Line Resolution 1/3" Sony Super HAD CCD II Dome Camera

- 700 TV Line Resolution
- 1/3" Sony Super HAD CCD II
- Day and Night Function
- 0.1Lux at F1.2 (Color) / 0.01Lux (B/W)
- 2DDNR (2D Digital Noise Reduction)
- Controlled by OSD Menu
- DC iris control
- Privacy Function
- Motion Detection
- Easy Installation & 3-Axis



Product Overview

DIMENSION

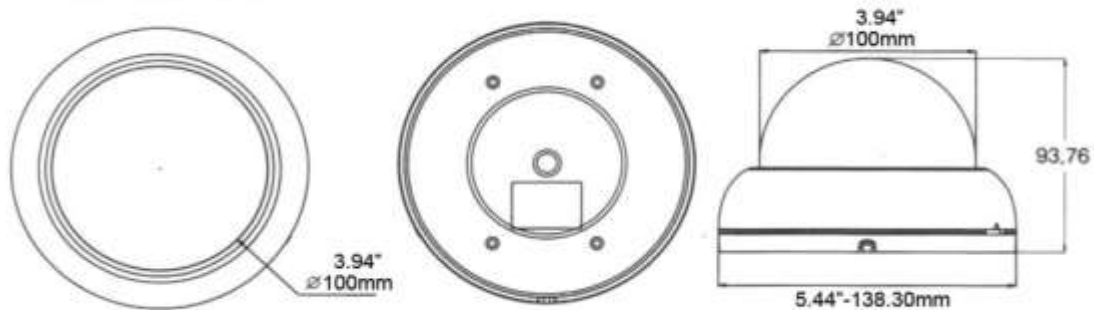

Head Office

IC Realtime
3050 N Andrews Ave AXE
Pompano Beach,
FL 33064

Tel: 1 (866) 997-9009
Fax: 1 (954) 827-5900
Email: Info@icrealtime.com
Web: www.icrealtime.com

West Coast Office

IC Realtime
14180 West Van Buren St.
Suite B105
Goodyear, AZ 85338

Tel: 1 (602) 910-3432
Fax: 1 (602) 626 3545
Email: west@icrealtime.com
Web: www.icrealtime.com

ICR-630

700 TV Line Resolution 1/3" Sony Super HAD CCD II Dome Camera

Resolution	700 TV Lines
Sensor	1/3 inch SONY Super HAD CCD II
Total Pixels	811(H) x 508(V) 410K pixels (NTSC) 795(H) x 595(V) 470K pixels (PAL)
Effective Pixels	768(H) x 494(V) 380K pixels (NTSC) 752(H) x 582(V) 440K pixels (PAL)
Scanning System	2:1 Interlace
S/N (Y signal)	More than 50 dB (AGC off)
Frequency	Horizontal : 15.734KHz / Vertical : 59.94Hz (NTSC) Horizontal : 15.625KHz / Vertical : 50.00Hz (PAL)
Video Output	BNC : 1.0Vp-p / 75Ω
Min. Illumination	0.1Lux at F1.2 (Color) / 0.01Lux (B/W)
Electronic shutter speed	ATW1 / ATW2 / AWC→SET / MANUAL Adjustable
Electronic shutter speed	Auto / Manual (1/60 sec ~ 1/100,000 sec NTSC) (1/50 sec ~ 1/100,000 sec PAL)
O.S.D	Built-in
Backlight Compensation	OFF / BLC / HLC Selectable
AGC (Auto Gain Control)	LOW, MIDDLE, HIGH, OFF Selectable
2DDNR (2D Digital Noise R	ON/OFF
Day & Night	AUTO / COLOR / BW / EXT
Motion Detection	OFF / ON (Motion size : 28 x 15, 4 AREA)
PRIVACY	OFF / ON (8 Zone)
Image Conversion	ON / OFF
SHARPNESS	ADJUSTABLE
Operating Temperature/ Hu	-14°F~122°F / -25°C ~ +50°C / 30% ~ 80% RH
Power	12VDC (300mA) / 24VAC (150mA) Dual Power
LENS	Auto Varifocal Lens 2.8-12mm
Color	Black and White
Dimensions	3.69"(H) 5.43"(D) - 93.76mm(H) 138mm(D)