




M32 Series - 600 lb Holding Force Magnalock®



M32 Shown

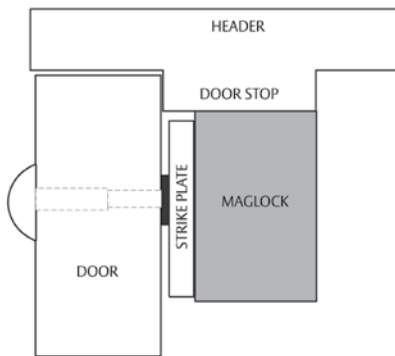

Application - 600 lb. holding force Magnalock with automatic dual voltage. Recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings.

Features and Benefits

- Patented instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Lock options include *BondSTAT* magnetic bond sensor and integrated door position switch
- UL Listed

Specification Data


Holding Force: 600 lbs. [272 Kg.]
 Current Draw and Voltage: 300mA at 12VDC; 150mA at 24VDC
 Operating Temperature: -40 to +140F [-40 to +60C]
 Shipping Weight: 6 lbs.
 Warranty: MagnaCare Lifetime Replacement Warranty

How To Order

Part #	Description
M32	Magnalock Model 32
M32F	M32, Face Mount
M32FB	M32, Face Mount, Mag Bond Sensor
M32FBD	M32, Face Mount, Mag Bond Sensor, Door Position Switch
M32FD	M32, Face Mount, Door Position Switch
M32B	M32, Mag Bond Sensor
M32BD	M32, Mag Bond Sensor, Door Position Switch
M32D	M32, Door Position Switch

Optional M32 Brackets & Accessories

Prefix	Description
ASB	Aluminum Spacer Bracket
SFP	Stop Filler Plate
CWB	Concrete Wood Bracket
UHB	Universal Header Bracket
HEB	Header Extension Bracket
GDB	Glass Door Bracket
ZA	Adjustable Z-Bracket Kit
Z	Fixed Z-Bracket Kit
DC	Dress Cover

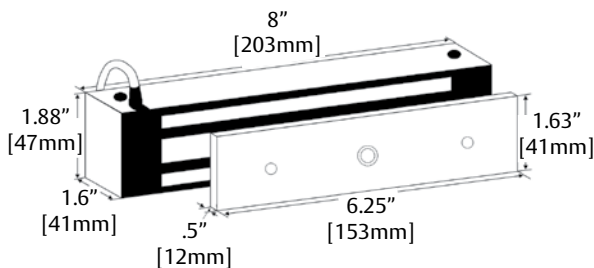

The M32 requires 2.25 inches of flat mounting space



U.S. Patents:
 #4,516,114 and #4,682,801
 NEMA: 4X IEC: IP 66

