



## Phone App Setup


To Begin, open the ICRSS Pro App and select the top left icon (menu) to bring up the menu for the app. Select the Device Manager

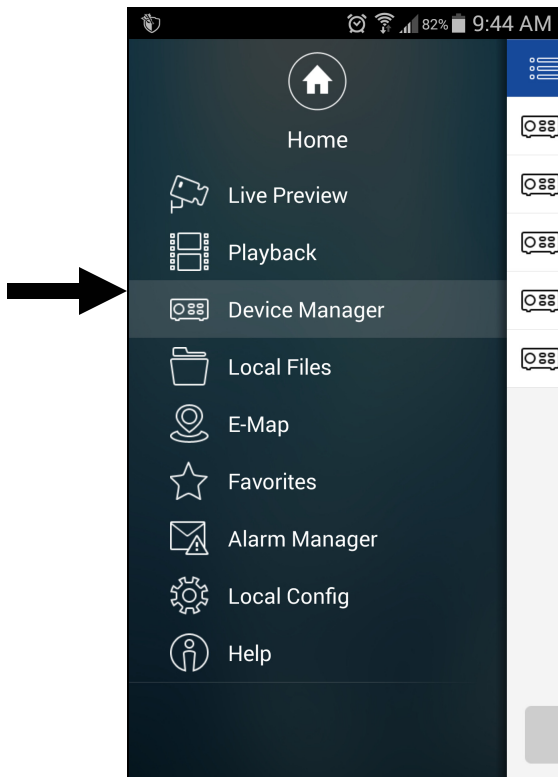

Tap on the top right icon “+” to add device

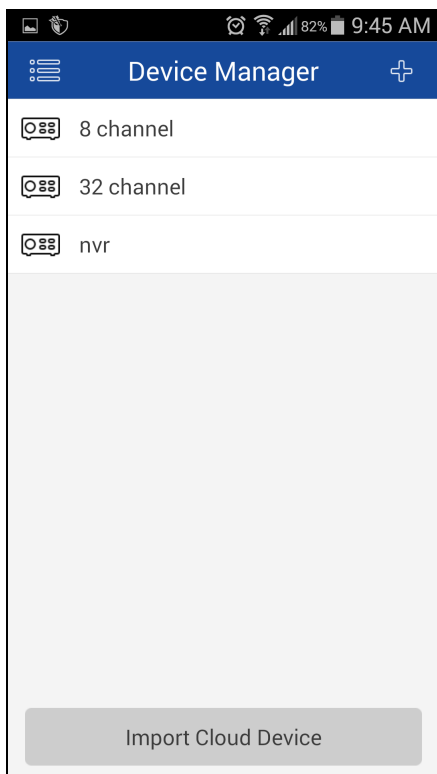

On this screen select IP/Domain

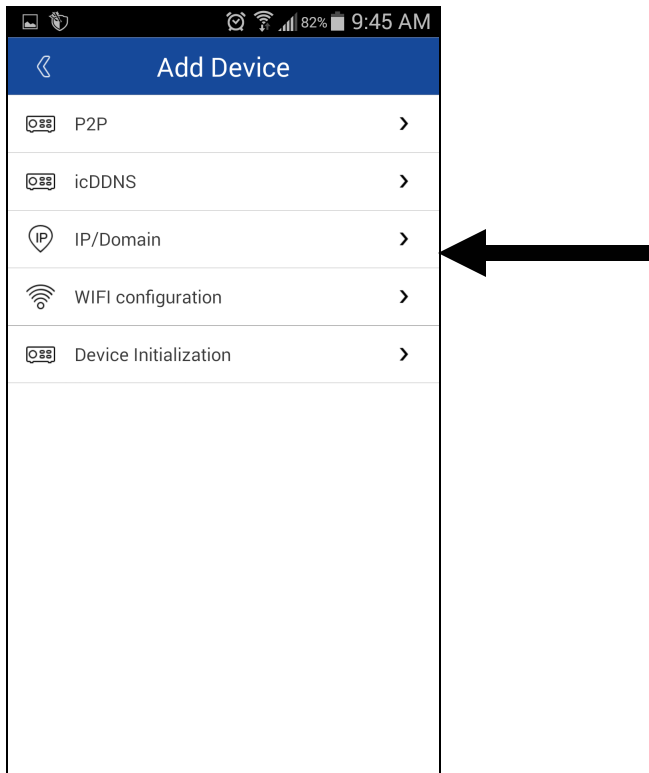

On this screen the entries that need to be made will be:


**Name:** Just a label so you know what device it is. (Home or Away)

**Address:** The IP address for this device setup


**Port:** This is the TCP Port listed in the DVR network menu

**Username:** admin (change if needed)


**Password:** This is the password for the admin account on the DVR

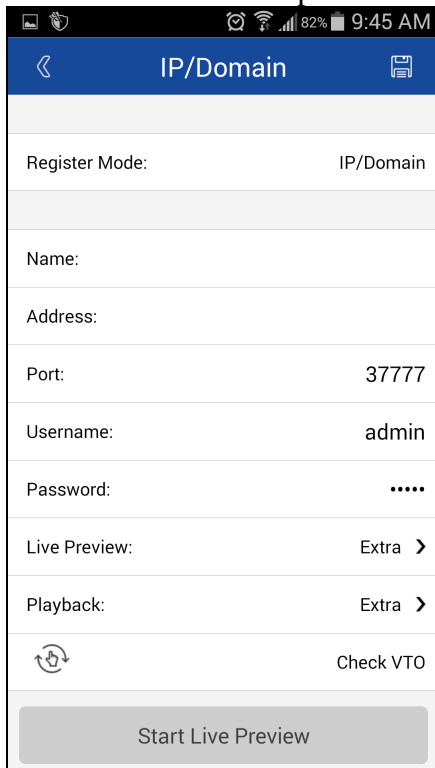


After entering your information, then tap on the top right icon to save the device settings

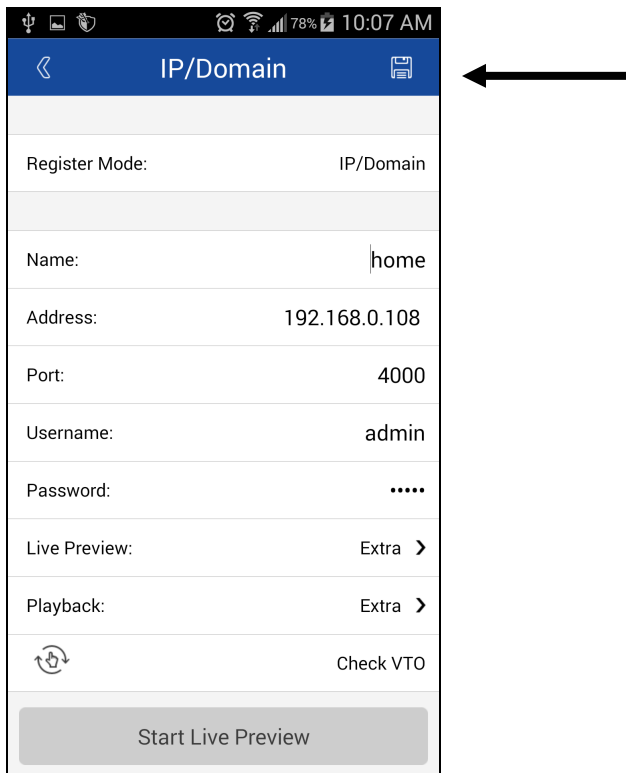

After saving your device settings you will be back in the “Device Manager” screen, tap the top left menu icon to select “Live Preview”. Select one of the active windows and tap on the “+” sign in the center

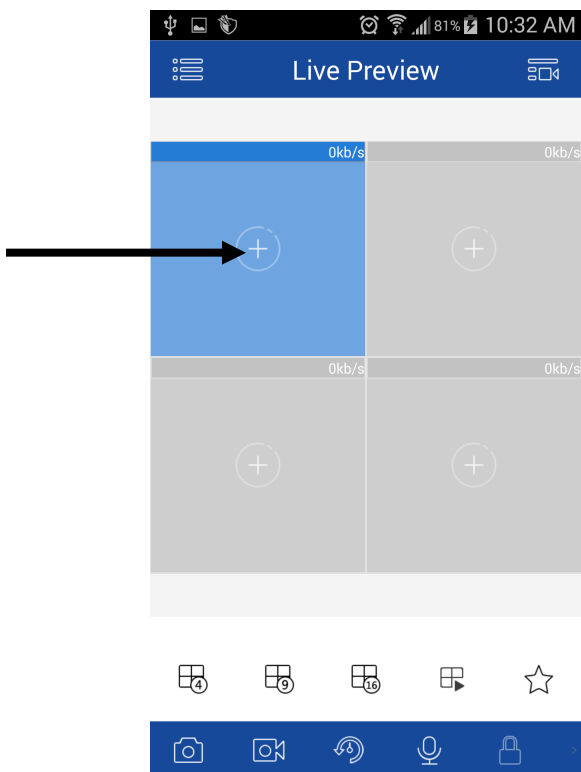

On this screen it will be normal for the first time accessing the new device to only have Channel 01 listed, once the app connects to the DVR the rest of the channel list will be pulled over from the DVR.

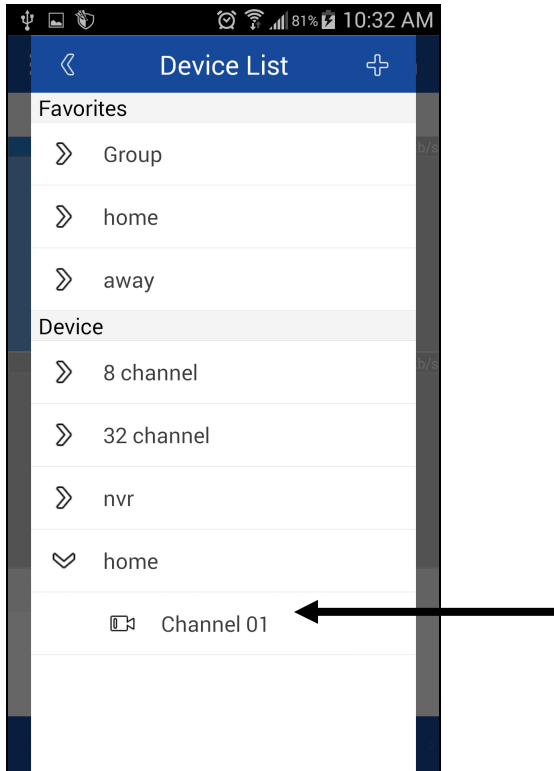

**Some notes on device settings:**

We use the labels “**home**” and “**away**” to identify the different network IP addresses.  
**Home** = Private network settings, same as what is assigned in the Network page of the DVR.

**Away** = DDNS address listed in the Network—>DDNS menu of the DVR, example:  
“mydvr.icddns.com”.

Port Forwarding for the TCP port through the router will need to be done for the access to the “Away” settings to work properly. The “Home” setting is when you are on your local private network (home wi-fi) .