




## (EEB) Emergency Exit Buttons


### Emergency Exit Buttons

- Emergency Exit Buttons offer additional safety, as required by code, for possible malfunction of motion exit sensor
- Mounted next to door
- Momentarily pressing the button releases door for 30 seconds
- Retriggerable
- Single gang or Narrow stile
- SPST 3 Amp wet N/C contacts
- Operates on 12 or 24 VDC (must be same voltage as the installed lock)
- For indoor use only
- UL Listed

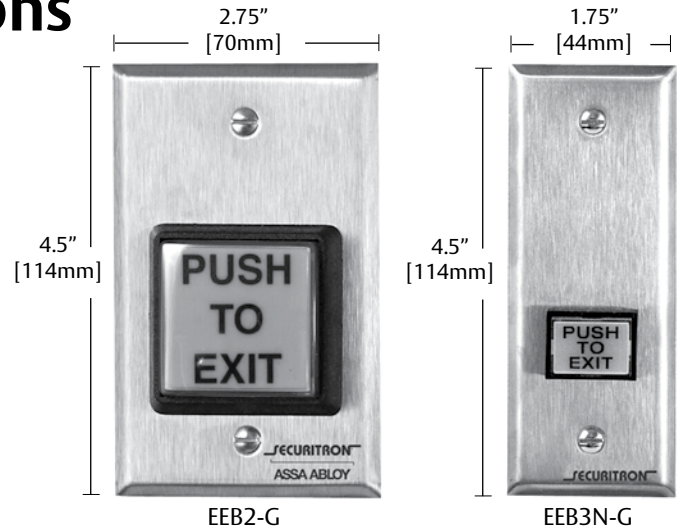

### Part # Description

EEB2-G	2" Square Emergency Exit, Green Button
EEB2-R	2" Square Emergency Exit, Red Button
EEB3N-G	1" x 3/4" Rectangle Emergency Exit, Green Button, <i>Narrow Stile</i>
EEB3N-R	1" x 3/4" Rectangle Emergency Exit, Red Button, <i>Narrow Stile</i>
PB2-LK	Illumination kit for EEB2-G and EEB2-R
PB3-LK	Illumination kit for EEB3N-G and EEB3N-R

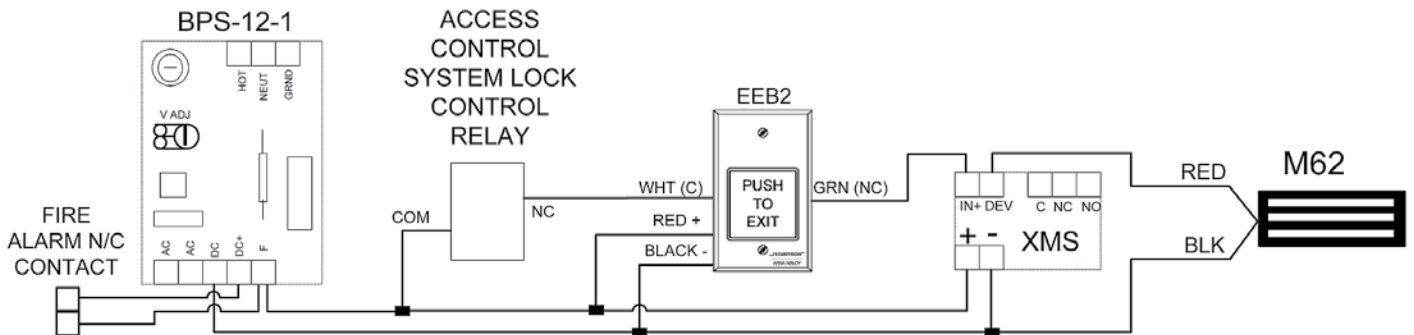

**NOTE:** The red and white wires from the EEB2/3N must receive voltage from the same power supply

Securitron's UL294 certification indicates that when the EEB is used with the XMS Motion Sensor, it meets the NFPA Life Safety Code 101 requirements for exit of access controlled egress doors

### Approvals and Listings

- EEB2 & EEB3N - Underwriter's Laboratories: File BP7041 (UL 294)
- California State Fire Marshal: 3774-0923:104



See Securitron's XMS Exit Motion Sensor on page 66



PB2-LK



PB3-LK



WCC and WBB available for all Single Gang push buttons, Keyswitches and Keypads. See page 42.